


MSX200 A-Series Specification Sheet

These versatile benchtop sectioning machines offer both linear and radial feed configurations in efficient benchtop models.

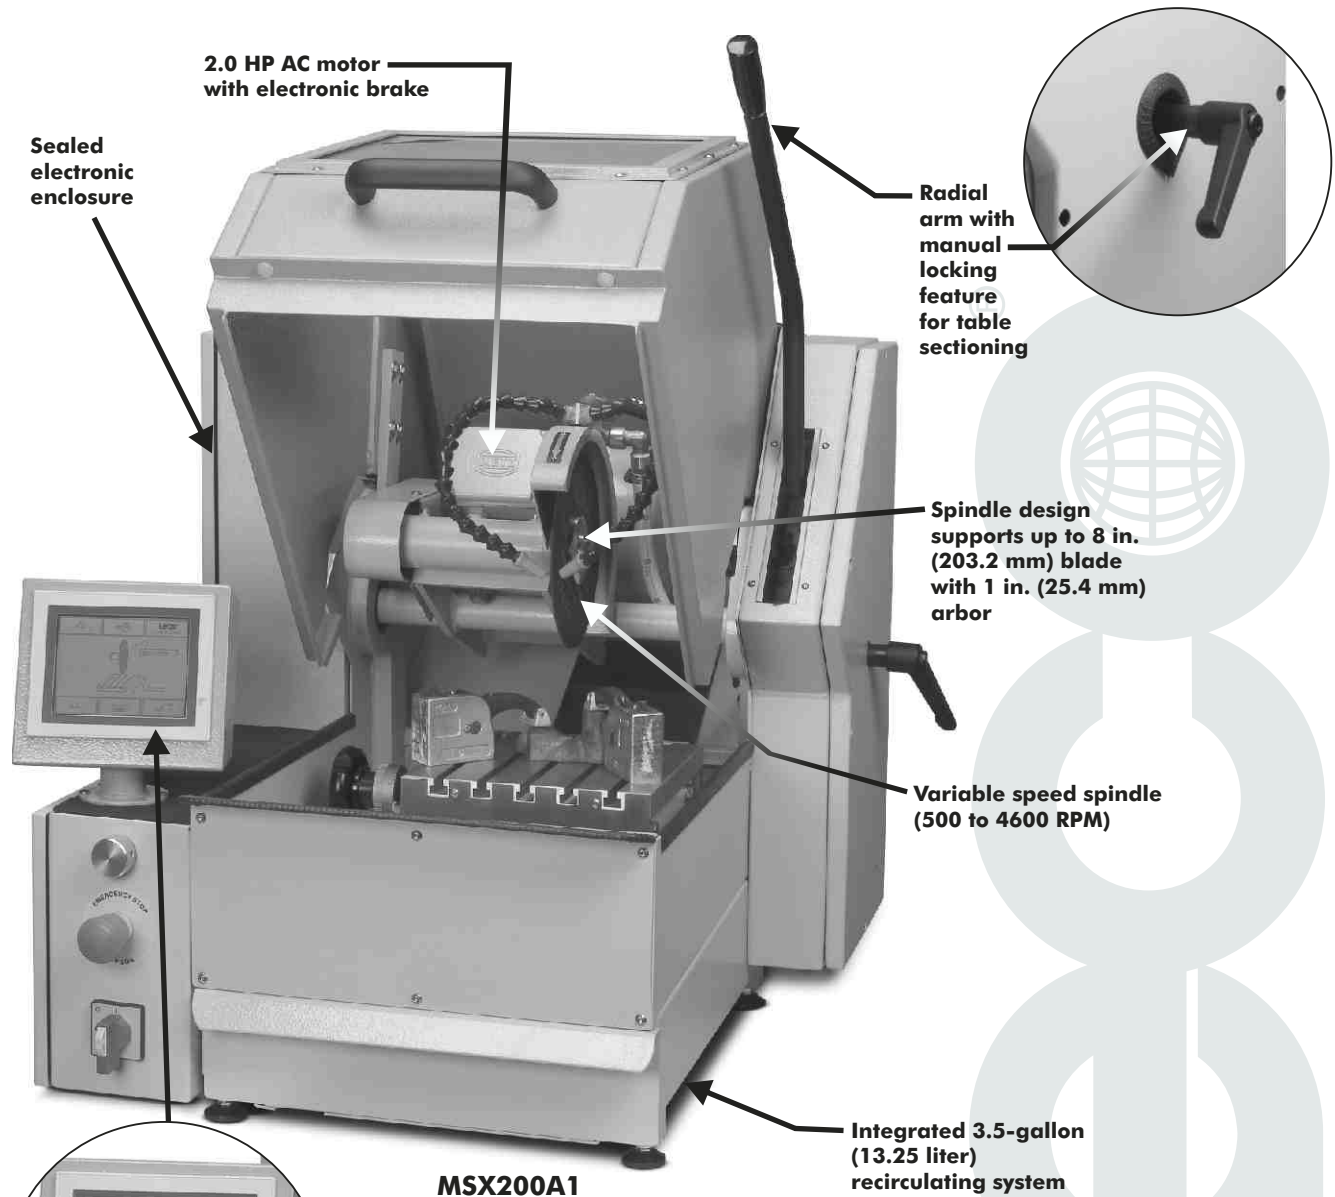

2.0 HP AC motor
with electronic brake

Sealed
electronic
enclosure

Radial
arm with
manual
locking
feature
for table
sectioning

Spindle design
supports up to 8 in.
(203.2 mm) blade
with 1 in. (25.4 mm)
arbor

Variable speed spindle
(500 to 4600 RPM)

Integrated 3.5-gallon
(13.25 liter)
recirculating system

MSX200A1

9 in. (228.6 mm) x
9 in. (228.6 mm)
T-slotted table for
flexible sample
fixturing

Manually
adjustable Y-table
for sample
position and
parallel sections

Convenient easy-to-operate
control panel

Automatic pulse feed rate with load
control maximizes sectioning efficiency
without burning samples